



Automated multi-vapor gravimetric sorption analyzer
for advanced research applications





Automated multi-vapor gravimetric sorption analyzer for advanced research applications

Key benefits of the DVS Advantage

- Single finger access for fast sample loading.
- High performance digital microbalance.
- Pre-heating of the sample up to 200°C.
- Full digital control of sample pre-heater and analysis temperatures.
- Multiple vapor reservoirs for rapid change from water to organic solutes.
- Multi-component vapor capability option.
- Unique in line transducer technology for measuring real time organic or water vapor concentrations.
- Compatible with NIR and Raman fibre optic systems.
- DVS Color Video option with full data annotation of digital images.
- Full automation of the widest range of experimental methods.
- Smart Windows XP operator interface with full 21CFR part 11 compliance.
- Comprehensive data analysis macros and advanced macros with 21CFR part 11 compliance.
- Optional comprehensive extended Isotherm analysis software.
- Dedicated worldwide applications and technical support.

The DVS Advantage
(patent pending)



Dynamic Vapor Sorption with the Advantage

DVS Advantage combines the best in microbalance, gas flow and vapor measurement technologies to deliver unsurpassed performance in terms of experimental design as well as instrument accuracy and repeatability.

The Advantage uses a dry carrier gas, usually nitrogen, and the user can select one of any two vapor sources. Precise control of the ratio of saturated and dry carrier gas flows is enabled with mass flow control combined with the use of unique real time vapor concentration monitoring for both water and organics. A known concentration of the selected vapor then flows over a sample suspended from a recording ultra-microbalance, which measures the weight change caused by sorption or desorption of the vapor molecule. It is these dynamic flow conditions that enable the sorption/desorption process to be so rapidly studied.

The sample may be pre-heated if desired as a further experimental option, and which in some cases may speed up the analysis cycle time as in the case of bulk absorption or the drying of inorganic hydrates. This heating can

be as a single step, or at a controlled ramp rate of temperature.


The temperature of the whole system is user selectable and precisely controlled under closed loop conditions to ensure that the solute vapor pressure at the sample is constant. Isolation valves at the solvent reservoirs ensure there is no solute contamination of the sample area when p/p_0 of zero is requested, ensuring that a true p/p_0 zero is always obtained.

The incredible sensitivity and precision of DVS Advantage enables the use of very small samples (typically 1 – 30mg) thus allowing equilibrium to be reached even more quickly.

Safety being paramount, there is a fully automated inert gas purge facility, and organic leak sensor system shut down interlock in the case of accidental organic vapor release.

The instrument is fully programmable and controlled by DVS Advantage software through a smart operator interface that meets the highest standards of data integrity and security. A full suite of data analysis modules running under Excel® allow one-click calculations and reports to be generated.

DVS Advantage schematic

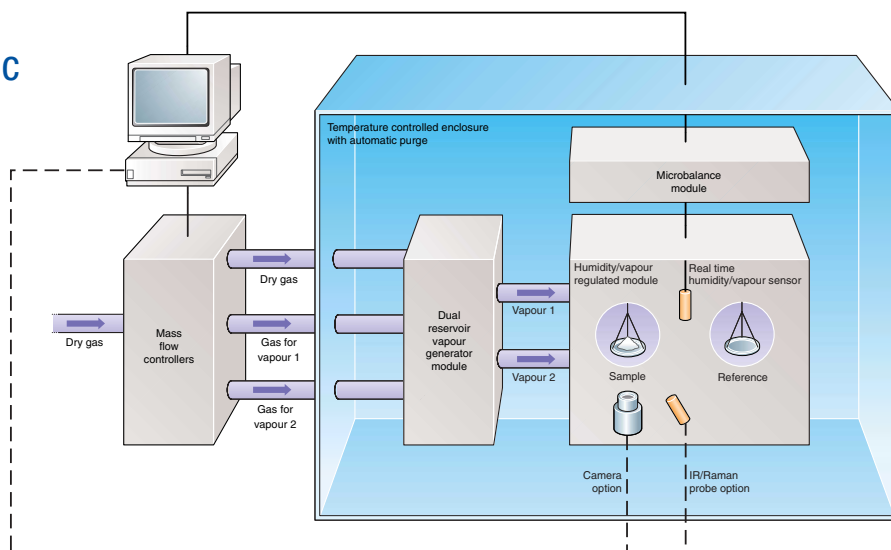

DVS Advantage Microscope option

The DVS microscope provides an integrated solution for the microscopic visualisation of samples during DVS experiments.

- High resolution camera
- X100 Lens
- Integrated optical fibre light source
- Integrated DVS Advantage control software
- Digital storage of captured images
- Overlay graphics with date/time/temperature/ vapor pressure

Effect of reducing humidity on PMMA



2 hours
at 98.5%RH

18 hours at
90.5%RH



Timed release drug capsules exposed to controlled humidity



1 hour
at 90%RH


4 hours
at 90%RH



DVS Advantage Control software

The all new control software enables a full range of conditions to be defined for isothermal and isohumidity (or constant partial pressure) sorption experiments.

Complex protocols for multiple experiments using sample pre-heating, different solvents, with change of sample temperatures and time, with ramp or step changes, can be set up, and run fully automatically, thus releasing valuable operator time.

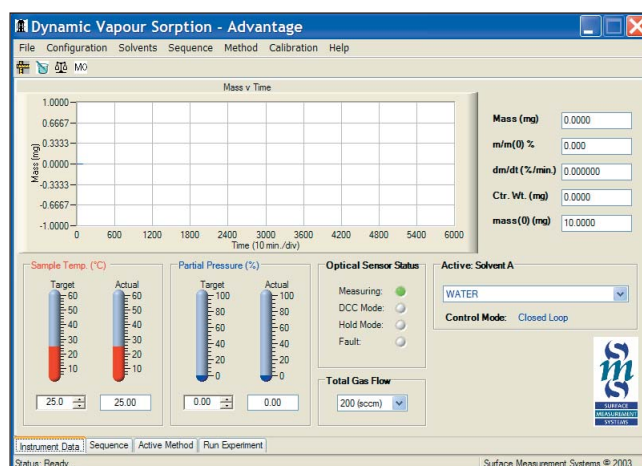

Control software screen shot

DVS Advantage Analysis and advanced analysis software

Simple transfer to an Excel® environment, using the DVS Advantage analysis software, opens up a range of options depending upon the nature of the application.

- Calibration and balance taring
- Isotherms
- Kinetic information
- BET Surface areas
- Heat of sorption
- Surface energetics
- Vapor pressure
- Amorphous content


Isotherm Analysis software

Unique in one package, single key report generation from more than 20 different models:

- Data for the prediction of shelf life and storage stability (water isotherms)
- Understanding solvent interactions
- Understanding hysteresis
- Characterising surfaces


Examples of DVS Applications

- Moisture uptake behavior of food and natural materials.
- Stability and caking of food ingredients.
- Moisture diffusion into blister packaging systems.
- Moisture sorption of hydrophobic pharmaceutical materials.
- Surface energies and surface areas of powders using organic vapor probes.
- Determination of deliquescence points.
- Moisture-induced glass transition in an amorphous material.
- Determination of amorphous contents.
- Pharmaceutical stability, drying and thermal degradation.
- Adsorption of porous materials.

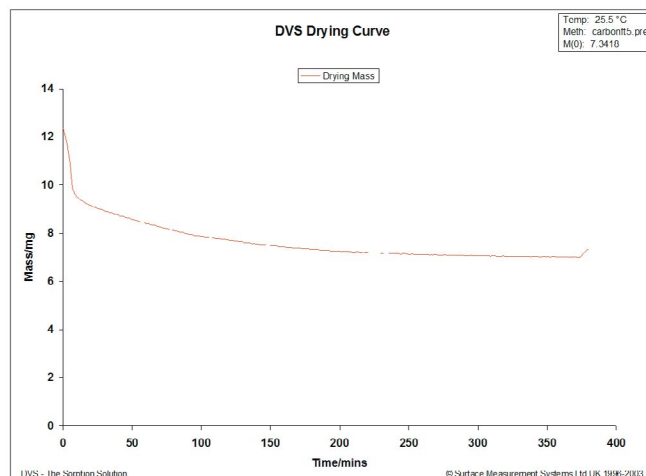


DVS pre-heating – CoCl₂ hexahydrate drying at 200°C

Moisture sorption behavior of rice starch at 25°C – 2-cycle experiment

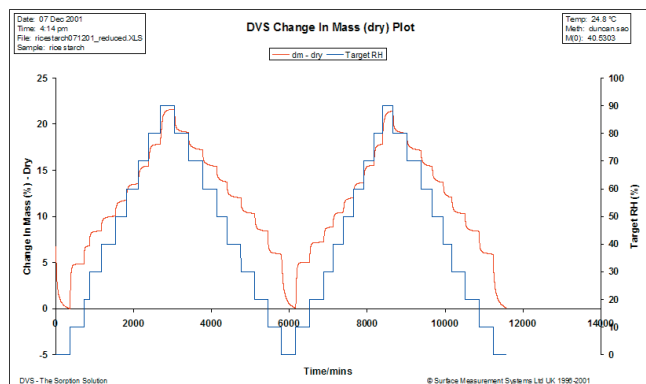


DVS change in mass plot

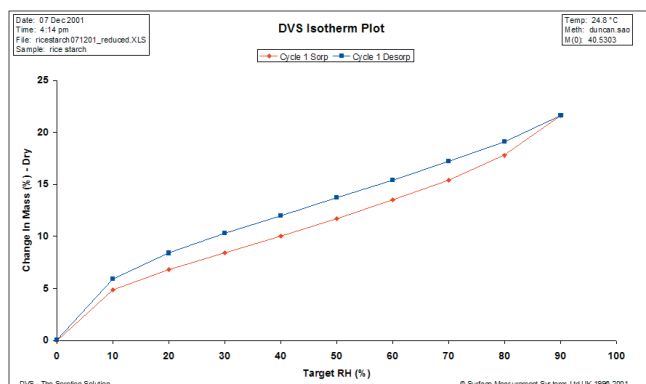


DVS isotherm plot

Cyclohexane on activated carbon at 25°C – closed loop

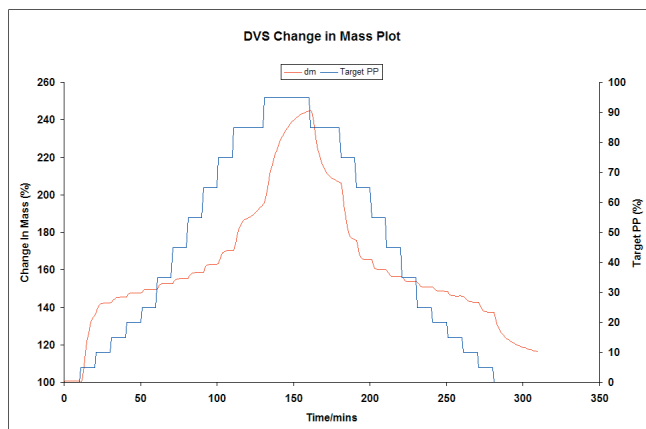

DVS change in mass plot

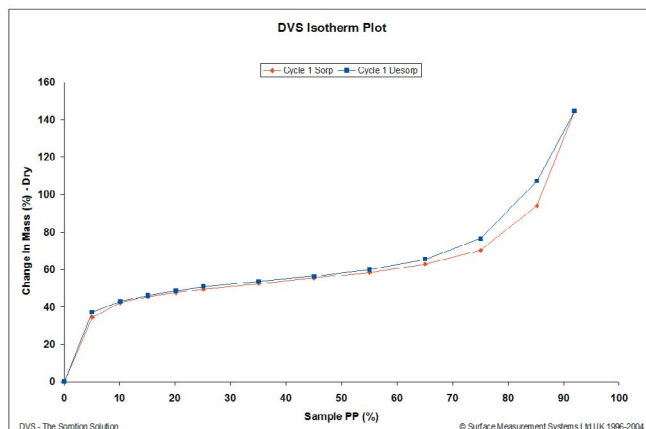

DVS isotherm plot

DVS Advantage instrument range

MODEL	DVS Advantage 1	DVS Advantage 2
Sample capacity	1.5 g	10g / 100g
Dynamic range	150mg	1g / 10g
Minimum sample weight	1mg	20mg
Sensitivity	0.1µg	1µg / 10µg
Sample pre-heater temperature range	up to 200° C	up to 200° C
Temperature range	5-60° C	5-60° C
Humidity range	0-98% RH	0-98% RH
Humidity accuracy	±0.5% RH	±0.5% RH
Vapor concentration range	0-96% p/p _o	0-96% p/p _o
Vapor pressure accuracy	±0.7% p/p _o	±0.7% p/p _o
Gas requirement (nitrogen)	0-200 sccm	0-200 sccm

Due to continuing product improvements, specifications are subject to change without notice

The Surface Measurement Systems scientific support advantage

A dedicated team of PhD scientists based in two continents is available to assist with application and experimental design questions. They are supported by fully equipped laboratories providing all the necessary resources to demonstrate feasibility, and also to provide analysis on a contract basis if desired.

While the DVS Advantage technology is inherently reliable, worldwide service and technical support is available, including on-demand and planned maintenance contracts.



HEAD OFFICE

Surface Measurement Systems Ltd
3 Warple Mews, Warple Way
London W3 0RF

Tel: +44 (0) 20 8749 4900
Fax: +44 (0) 20 8749 6749
email: smsinfo@smsuk.co.uk
www.smsuk.co.uk

USA, CANADA and MEXICO

Surface Measurement Systems, NA
2222 South 12th Street, Suite D
Allentown, PA 18103

Tel: +1 610 798 8299
Fax: +1 610 798 0334
email: info@smsna.com
www.smsna.com

